



# ALTRA 3D MINING

## THE MOST RESILIENT SOLUTION

Since 1895, NIEDNER has been redefining the firefighting industry by creating lighter, more versatile lay-flat hoses to overcome the challenges firefighters face. What makes firefighters around the globe trust NIEDNER's solutions is first and foremost the high quality of the products. The hoses have been engineered to stand up under the most demanding applications, including intense heat and abrasion.

### FLEXIBILITY

Due to the flexibility of ALTRA 3D, our woven lay flat hose can easily cope with extreme environmental and climatic challenges and changes. The ALTRA 3D solution is engineered to resist abrasion by solids as well as corrosion by fluids transported in various applications. This means that the ALTRA 3D solution lasts much longer than the alternatives. In fact, when operating within the hose specifications, no extra maintenance is required during the hose's lifetime, resulting in less down time and considerable time and investment savings.

### HIGHEST LEVEL OF QUALITY

NIEDNER maintains the highest levels of quality in the design, manufacturing, and testing of all our products. As a result, our solutions exceed recognized international standards.

### UNIQUE SERVICES

Our solutions have many advantages, including our unique services and our engineering support, which is second to none.



Highly safe hose



Corrosion and maintenance free



Short lead-times and quick to install



Reusable



Available in various lengths



Increased resiliency



Commitment to the environment



## FEATURES

- Lightweight and flexible, even below freezing point
- Abrasion and puncture resistant
- High operational/burst pressure
- Low expansion (linear and radial)
- Pump weight: max 5,000 lb
- Replaceable cable attachment system
- Increased resiliency
- So resistant that pumping remains possible, with minimal pressure loss, even if perforation occurs

## DESIGN

- 3D technology for a single-layer 2-in-1 hose
- Also available in long length (>1,000 ft)
- Highly safe hose. Will not split in two upon bursting

## ADVANTAGES

- Meets NFPA:1961 and API-15LF specifications
- Temperature range: -65°F to 150°F (-53°C to 65°C)
- Potable water contact: Certified NSF 61
- The cable attachment system resists a pull strength 15x higher than the competition
- ALTRA 3D (any diameter) offers a burst pressure 200 psi higher than any other flexible hose
- Corrosion resistant and maintenance free

## OUR PRODUCT LINE CERTIFICATIONS

NIEDNER's solutions are certified by accredited independent institutes



## ALTRA 3D SERVES THE FOLLOWING INDUSTRIES

- Mining
- Water Utilities
- Industrial
- Municipal
- Environmental
- Agricultural

## TECHNICAL DATA VERTICAL SOLUTION


Diameter	Weight		Flat Width		Thickness		Inside		Avg. Flow		Pressure		Burst Pressure				Max Depth		Elongation	Expansion	Theor. Tensile Strength	
	Inches (mm)	Lb/ft	Kg/m	All lengths	Wall	Diameter			Operating*	Minimum	Average								Maximum @200psi	(Radial) Maximum @200psi	Maximum lbf	Maximum TON
4" (100mm)	0.91	1.35	6.35	16.15	0.22	5.7	4.00	102	750-1250	170-284	480	33	>1200	>83	>1200	>83	>1000	305	3%	4%	>125,000	62
6" (150mm)	1.75	2.60	9.76	24.79	0.28	7.1	5.98	152	1000-3000	227-681	425	29	>1060	>73	1130	78	950	290	3%	4%	>200,000	99
8" (200mm)	2.35	3.50	12.83	32.59	0.36	8.1	7.95	202	2000-4000	454-909	320	22	>800	>55	870	60	600	183	4%	5%	>300,000	149

\*for a safety factor of 2.5

AVAILABLE COLORS: Grey




### EXPANSION ALTRA 3D VS COMPETITION

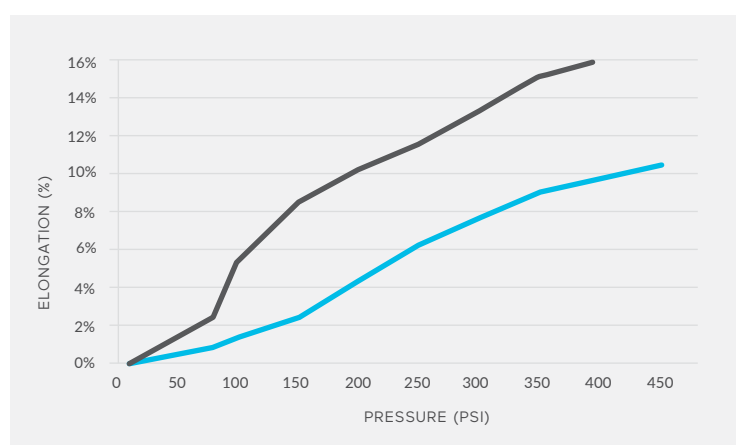

ALTRA 3D 8" Competition


### AVERAGE BURST PRESSURES COMPARISON

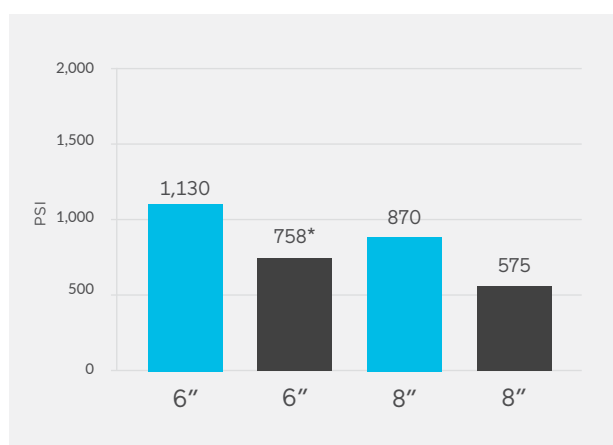

ALTRA 3D Competition

\*Not safe failure mode

### ELONGATION ALTRA 3D

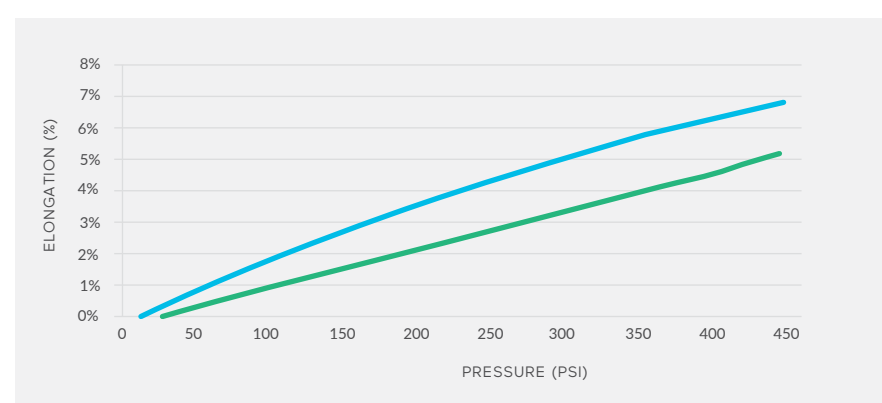

ALTRA 3D 6" ALTRA 3D 8"

### CONTACT

sales@niedner.com  
 Tel: 800-567-2703  
 675 Merrill Street, Coaticook, Quebec J1A 2S2